


IL 21 — MILWAUKEE AVE. EXISTING TYPICAL SECTION

STA. 85+53 TO STA. 89+81
INCLUDES NB RT TRN LN: STA 73+20 TO STA 76+68

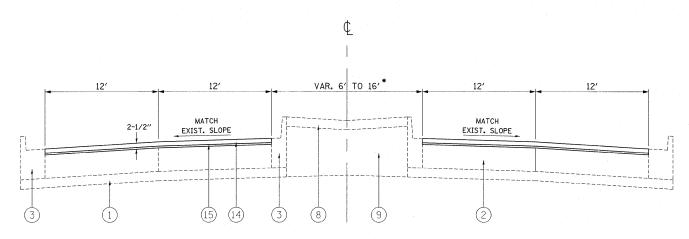

IL 21 – MILWAUKEE AVE. PROPOSED TYPICAL SECTION

STA. 85+53 TO STA. 89+81
INCLUDES NB RT TRN LN: STA 73+20 TO STA 76+68

NOTES:

* AT LOCATIONS WHERE MEDIAN IS 6' WIDE THERE IS A 10' TRN LN

FILE NAME =	USER NAME = tariqfm	DESIGNED -	REVISED -	
c:\pw_work\pwidot\tariqfm\d0238476\D107	11-sht-plan.dgn	DRAWN -	REVISED -	STATE OF ILLINOIS
	PLOT SCALE = 50.00000 '/ in.	CHECKED -	REVISED	DEPARTMENT OF TRANSPORTATION
	DLOT DATE = 10/10/2011	DATE -	DEVISED -	1

LEGEND

- (1) EXISTING STABILIZED SUB-BASE, 4"
- 2) EXISTING PCC PAVEMENT, 10"±
- (3) EXISTING COMBINATION CONCRETE CURB AND GUTTER
- (4) EXISTING SB MEDIAN
- (5) EXISTING SM MEDIAN
- (6) EXISTING STABILIZED MEDIAN SURFACE, 12"
- (7) EXISTING CORRUGATED MEDIAN
- (8) EXISTING CONCRETE MEDIAN SURFACE, 4"
- (9) EXISTING SAND FILL
- (10) EXISTING TOP SOIL AND SODDING
- (11) PROPOSED MEDIAN REMOVAL PARTIAL DEPTH
- (12) PROPOSED HMA SURFACE REMOVAL, 2-1/2"
- (13) PROPOSED PCC SURFACE REMOVAL, VARIABLE DEPTH
- (14) PROPOSED POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F", N90, 1-3/4"
- (15) PROPOSED POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50, 3/4"
- (16) PROPOSED PARTIAL DEPTH REMOVAL, 3"
- PROPOSED HMA BINDER COURSE, IL-19.0, N70, 3"
 (NOTE: FOR LONGITUDINAL JOINT REPAIR, SEE DETAIL ON SHEET #6)
- (18) PROPOSED MEDIAN REMOVAL
- (19) PROPOSED CLASS D PATCHES, TYPE IV, 10 INCH

THE CONTRACTOR SHALL PATCH FIRST BEFORE MILLING

IL 21 (EUCLID AVE. TO GLENVIEW RD.)

EXISTING AND PROPOSED TYPICAL SECTIONS

CALE: SHEET NO. OF SHEETS STA. TO STA.

F.A.P. RTE. SECTION COUNTY TOTAL SHEETS NO.

374 211K-RS-1 COOK 27 8

CONTRACT NO. 60M07